

# CDV50P/DRC-40CK

## 1-Way Colour Video Entry

### CDV50P/DRC-40CK

The CDV-50P/DRC-40CK is an entry level, 1-way, colour video entry kit. By employing the same high quality components and build specification as the standard Commax range, the system meets the requirements for video entry where traditional systems may be uneconomical.

Supplied in a boxed kit form, the CDV50P/40CK includes a stylish 5" LCD TFT colour monitor and a robust door station. The system requires just 4 wires to connect the door station to the monitor handset, and with the lock release function being supplied from the door station, the installation is simple and fast.

Options include a flush or surface mounted, stainless steel housing kit with the additional option of integrating a keypad or proximity reader. A second door station can be connected, along with a second monitor handset and/or an audio extension phone.



### Technical specification

#### Monitor

- Colour 5" TFT-LCD screen
- Full duplex handset
- 100-240Vac, 50/60Hz, 16W
- 258 x 159 x 51mm (w x h x d)
- 0 to 40C operating temperature
- 2Kg weight

#### Door Station

- CMOS image sensor
- Full duplex transmission
- 12Vdc (supplied from monitor)
- 0.1 Lux (within 300mm)
- Embedded white LED
- 101 x 142 x 32mm (w x h x d)
- -10 to +40C operating temperature
- 300g weight

### Product features

- 5" TFT LCD colour monitor
- Robust door station (optional stainless steel)
- Up to 2 door stations
- Up to 2 monitors + audio phone
- Optional stainless steel housing
- Option to integrate keypad or prox
- 4-wire connection
- Lock control from door station
- Door answer/door monitor
- Extremely competitive
- 12 months warranty

### Option examples:




Stainless steel surface panel

Stainless steel surface panel with integral keypad

# CDV50P/DRC-40CK

## 1-Way Colour Video Entry

### CDV50P/DRC-40CK 1-Way Colour Video Entry Kit

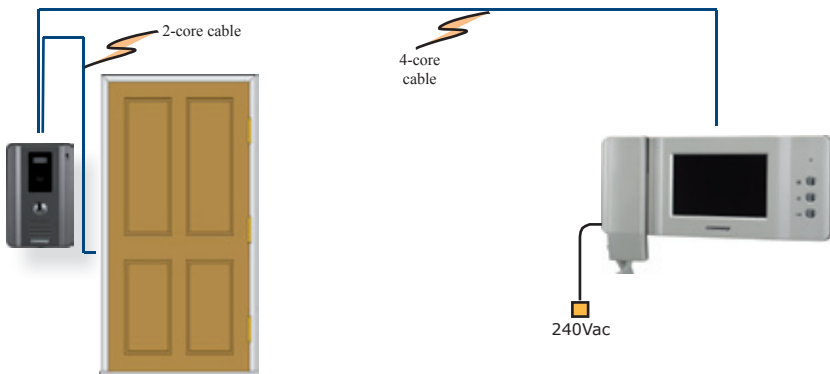


**Standard 1 to 1 kit:**

Simple 4-wire connection between the monitor and the door station. The lock release is controlled via a clean normally open contact.

**Note:**

The lock release is supplied separately, therefore an additional power supply is required to supply the lock (ac or dc depending on lock type) - for clarification, please contact the technical support department.

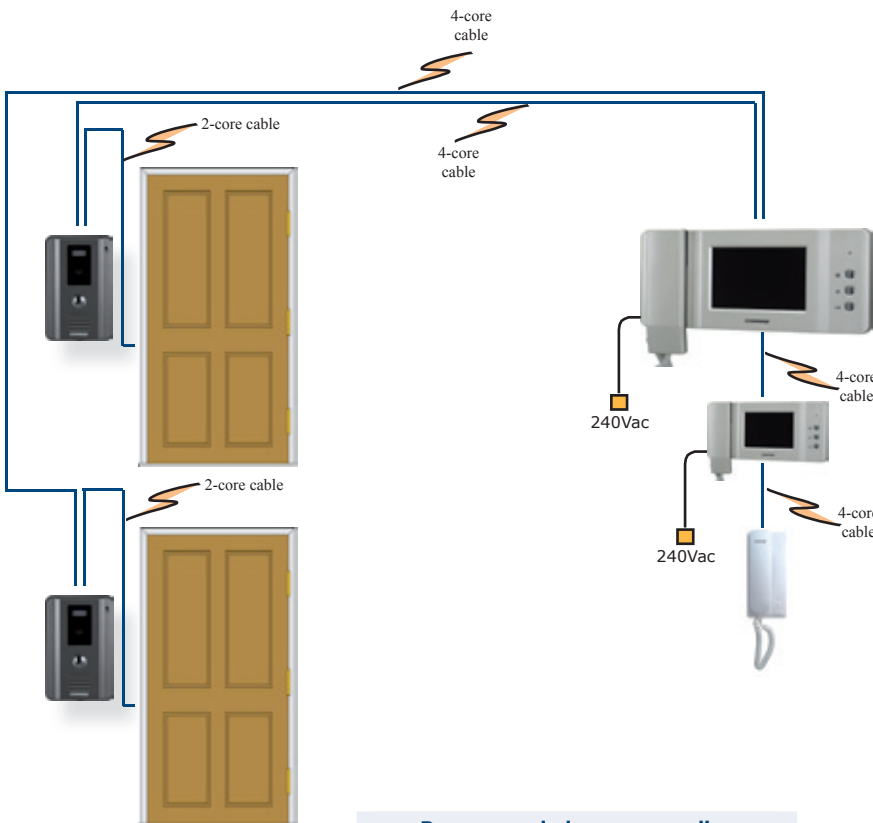

**Complete system capability:**

Simple 4-wire connection between the monitors and the door stations. The lock releases are controlled via clean normally open contacts.

**Note:**

The lock releases are supplied separately, therefore additional power supplies are required to supply the locks (ac or dc depending on lock type) - for clarification, please contact the technical support department.

**Recommended power supplies for lock control**

 CA1R 12Vac	 ARD12 12Vdc	 PSU12/1 12Vdc - charger
--	---	---

**Product Code**

**Description**

CDV50P/DRC-40CK	1-way kit complete
CDV50P	Additional monitor
DRC-40CK	Additional door station
DR-4RV	Audio handset
40CKFSH	Flush stainless housing
40CKSSH	Surface stainless housing
40CKFIK	Flush integrated keypad
40CKSIK	Surface integrated keypad
40CKFIP	Flush integrated prox
40CKSIP	Surface integrated prox